




# Galaxy Tab S 10.5 Camera Replacement

How to replace a faulty camera.

Written By: Jordan Soto

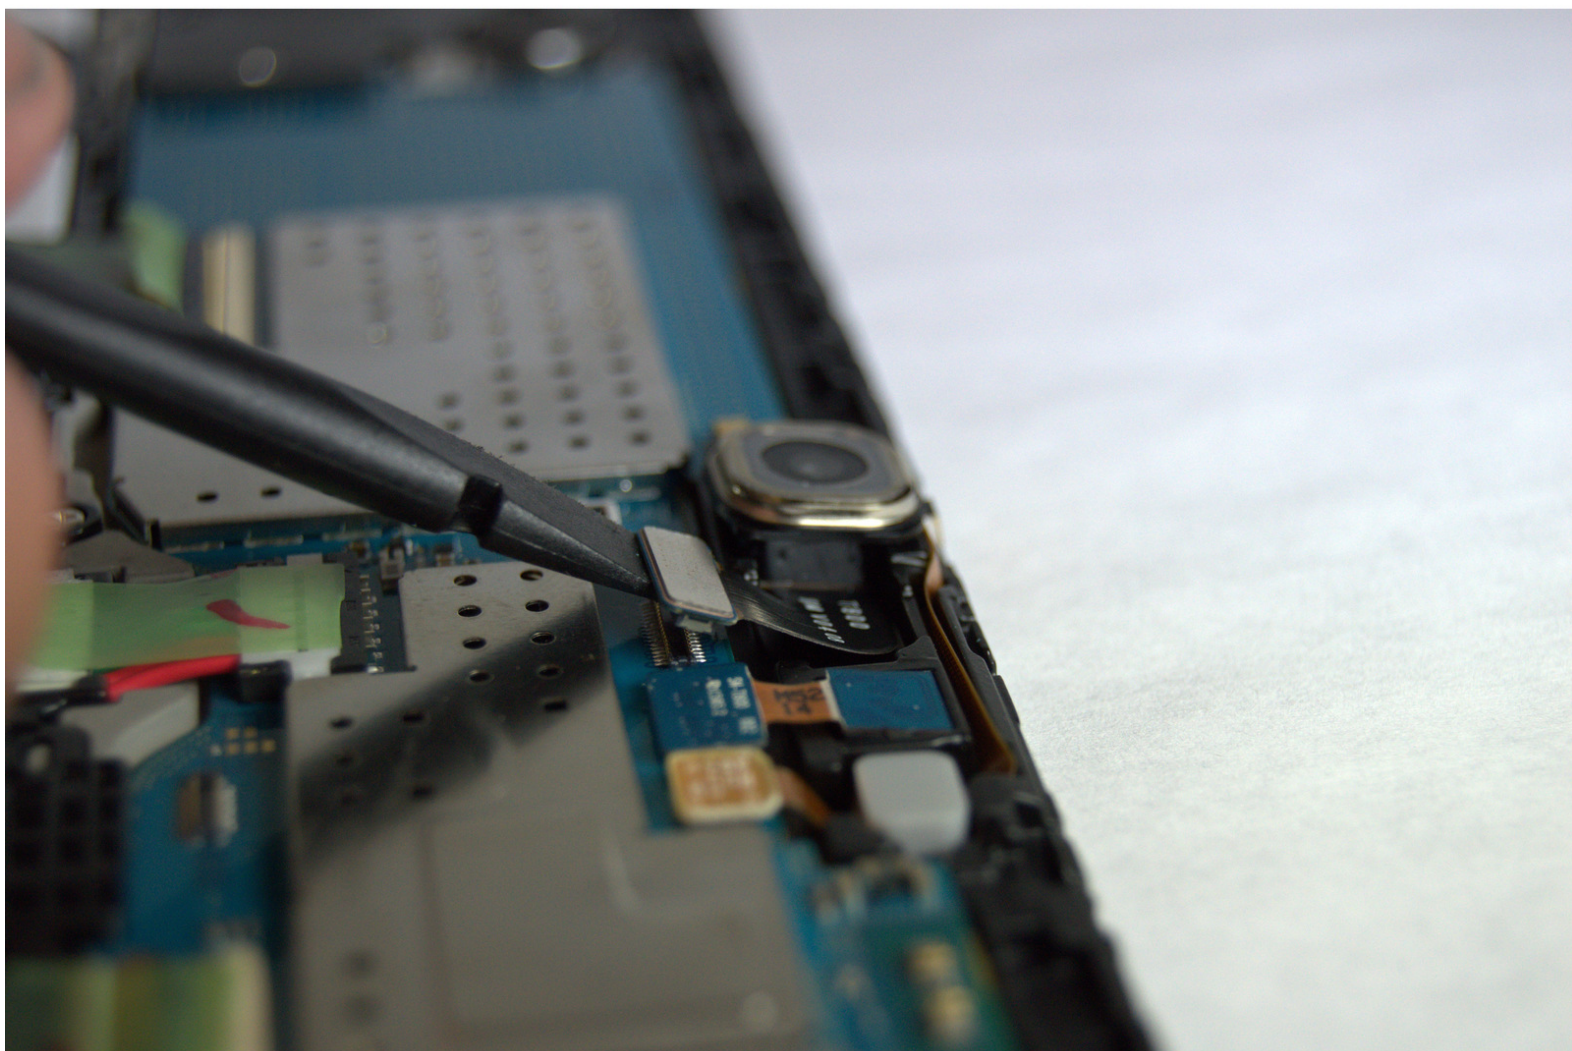

## INTRODUCTION

This guide will give step by step instructions on how to remove and replace the camera in a Samsung Galaxy Tab S 10.5.



### TOOLS:



- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)



### PARTS:

- [Galaxy Tab S 10.5 Rear Facing Camera](#) (1)
- [Galaxy Tab S 10.5 Front Facing Camera](#) (1)

## Step 1 — Back Cover

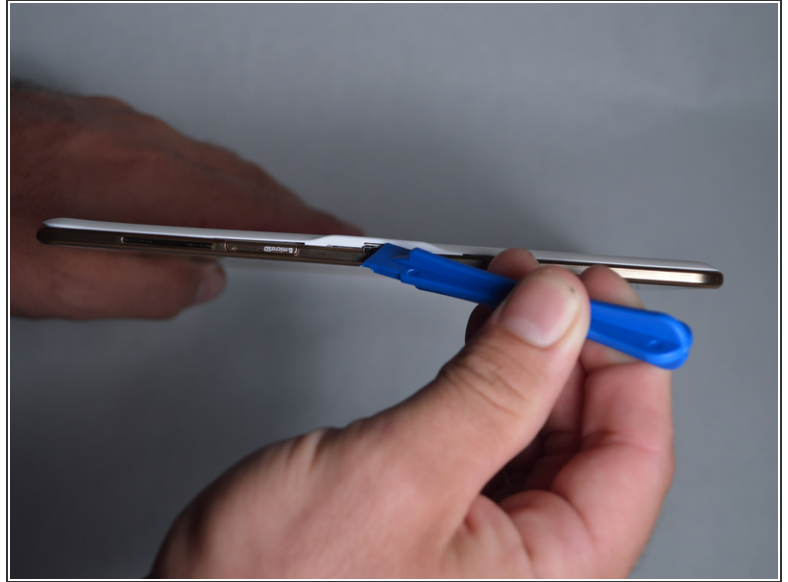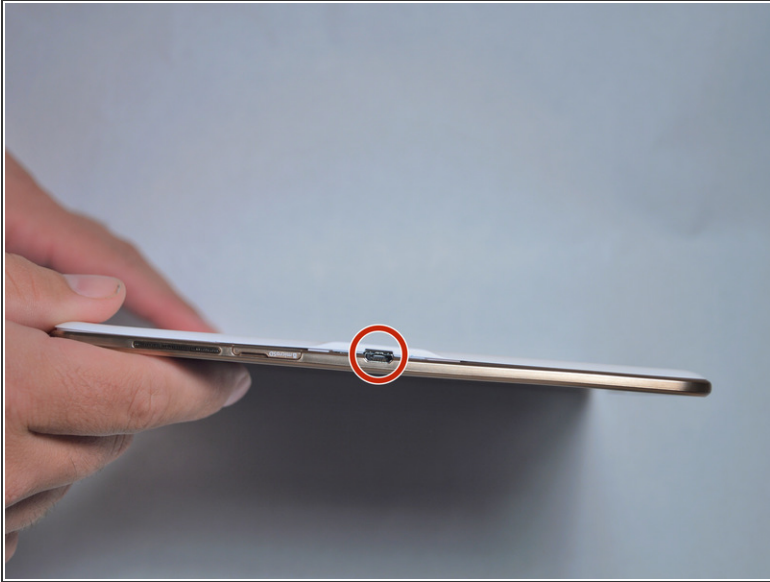

- Place the plastic opening tool into the SD card slot or charge port.
- Pry in an upward motion until you see a separation between the tablet and back cover.


## Step 2



- Work around the entire device by sliding the plastic opening tool around the rim.
- ⓘ If this is the first time, it will be hard to separate the back cover from the tablet.
- ⓘ The clips are approximately 5 cm apart. While working around the device, the clips will make a dislocating sound when disconnected.






## Step 3

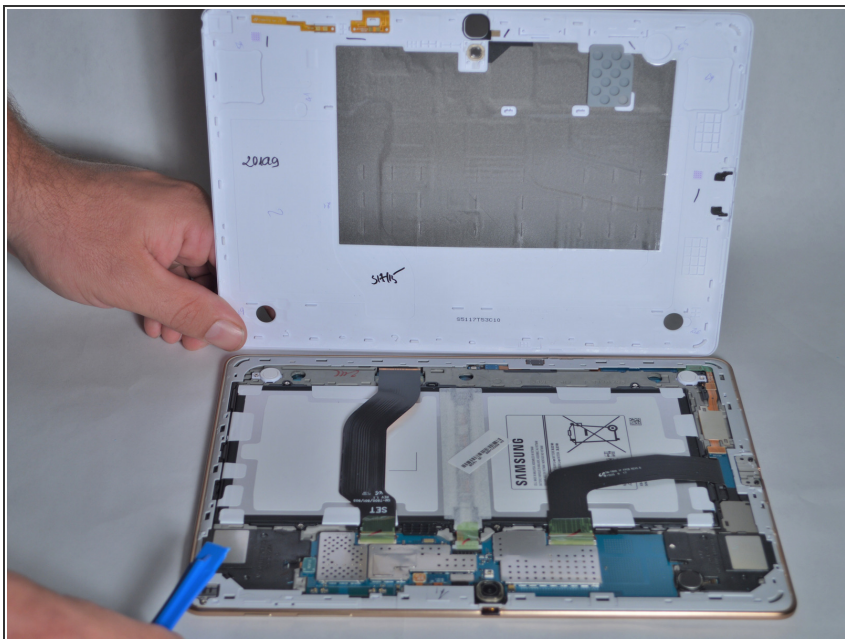

- Remove the back cover once all links have been separated.

⚠ Be careful when touching any of the internal components of the tablet.

## Step 4 — Camera

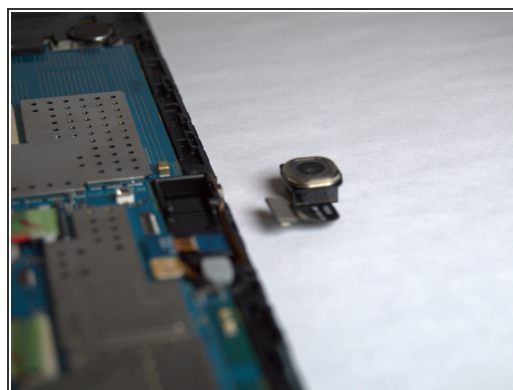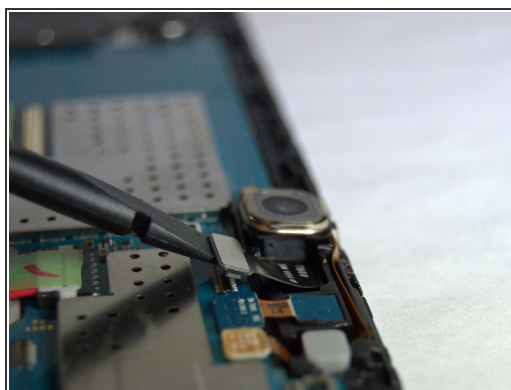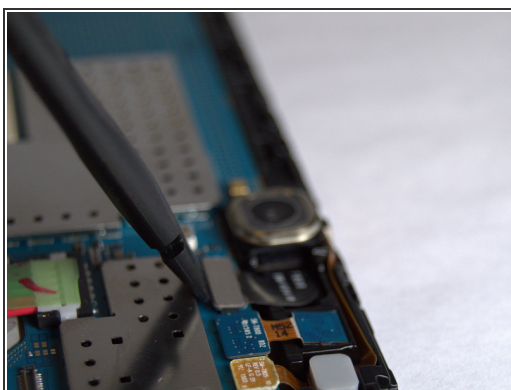

- Use a spudger to disconnect the camera from the motherboard and then remove the camera.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-05 10:04:40 AM.